


CABLE ACERADO PARA RETENIDA

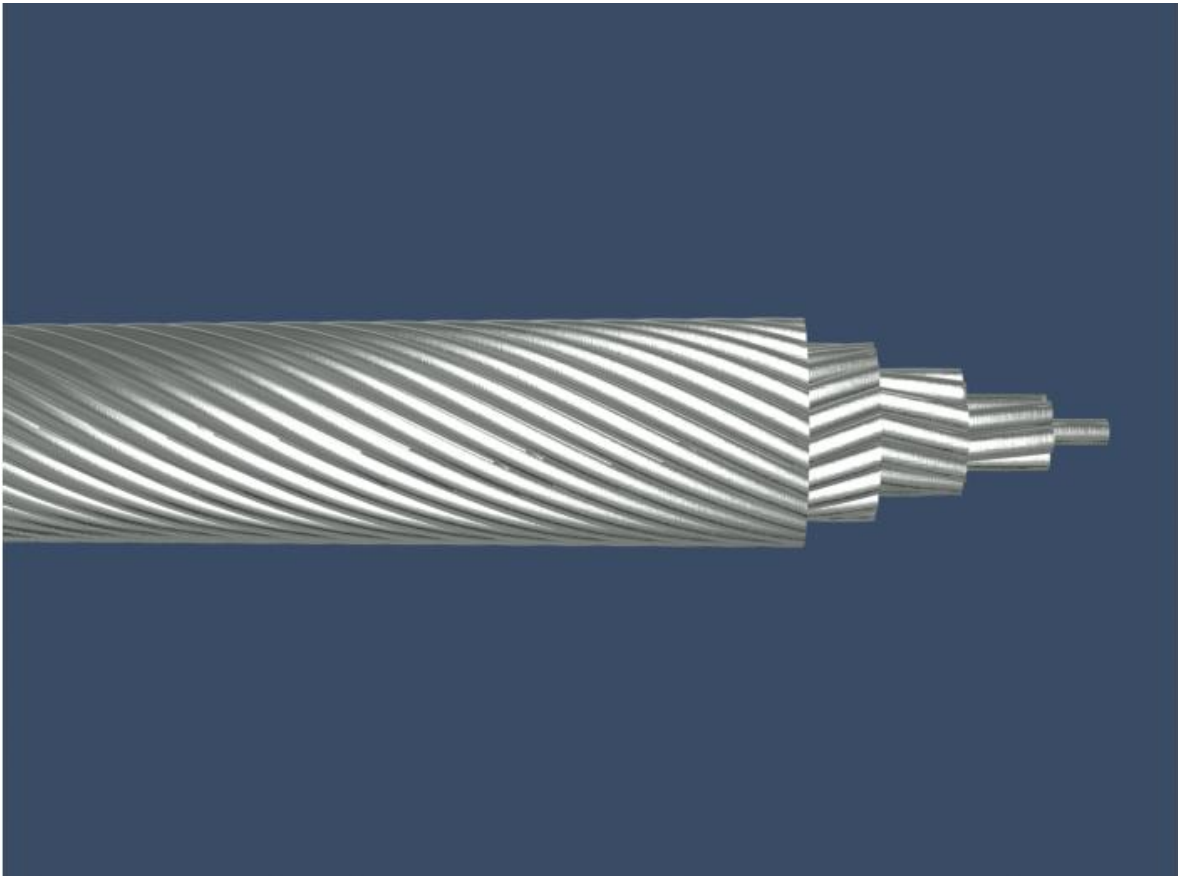

DESIGNACIÓN DEL CABLEADO

7 Alambres		19 Alambres				37 Alambres		
								
CODIGO	CALIBRE (kcmil)	NUMERO DE ALAMBRES	DIAMETRO ALAMBRES (mm)	DIAMETRO TOTAL (mm)	AREA (mm²)	PESO TOTAL (kg /km)	RESISTENCIA C.C. 20° C Ohm/km	CARGA ROTURA (kgf)
Akron	30.58	7	1,68	5,04	15,5	43	2,159	503
Alton	48.69	7	2,12	6,36	24,7	68	1,356	798
Ames	77.47	7	2,67	8,01	39,2	108	0,855	1270
Azusa	123.3	7	3,37	10,11	62,4	171	0,536	1937
Anaheim	155.4	7	3,78	11,34	78,6	216	0,426	2445
Amherst	195.7	7	4,25	12,75	99,3	273	0,337	3080
Alliance	246.9	7	4,77	14,31	125,1	343	0,268	3883
Butte	312.8	19	3,26	16,30	158,6	435	0,211	4763
Canton	394.5	19	3,66	18,30	199,9	549	0,168	6033
Cairo	465.4	19	3,98	19,90	236,4	649	0,142	7076
Darien	559.5	19	4,36	21,80	283,7	778	0,118	8528
Elgin	652.4	19	4,71	23,55	331,0	908	0,101	9934
Flint	740.8	37	3,59	25,13	374,5	1028	0,089	11068
Greeley	927.2	37	4,02	28,14	469,6	1289	0,071	13835
CALIBRES EN mm²								
16 mm²		7	1,710	5,13	16,08	44	2,084	519
25 mm²		7	2,130	6,39	24,94	68	1,343	806
35 mm²		7	2,520	7,56	34,91	96	0,959	1128
50 mm²		7	3,020	9,06	50,14	138	0,668	1621
70 mm²		7	3,570	10,71	70,07	192	0,478	2160
90 mm²		7	4,050	12,15	90,18	247	0,371	2781
95 mm²		7	4,152	12,46	94,78	260	0,353	2923
120 mm²		19	2,836	14,18	120,02	329	0,279	3877